

**FHC Series**  
**SMD Flat Wire High Current Inductor**  
**Size 1335**

**CHARACTERISTICS**

- 
- 
- 
- Quantity: 400pcs
- Magnetic shielded structure


U

**APPLICATION**

- 
- High current DC/DC converter
- LC filter

Dimensions: [mm]

Land Pattern: [mm]

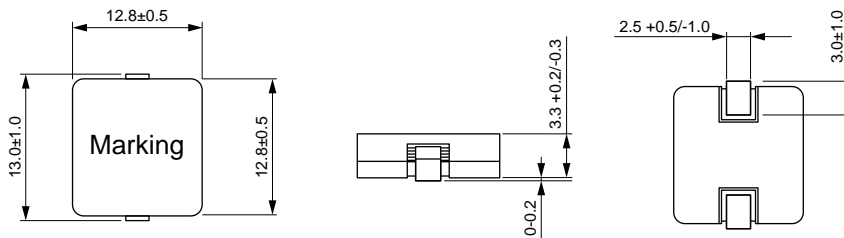

5.5

Electrical Properties:

Operating Temperature : -40 °C to +125 °C  
 Temperature Rise Current: the actual value of DC current when the temperature rise is T50C  
 Saturation Current that will cause initial inductance to drop approximately 30%

## Typical Electrical Characteristics:

