



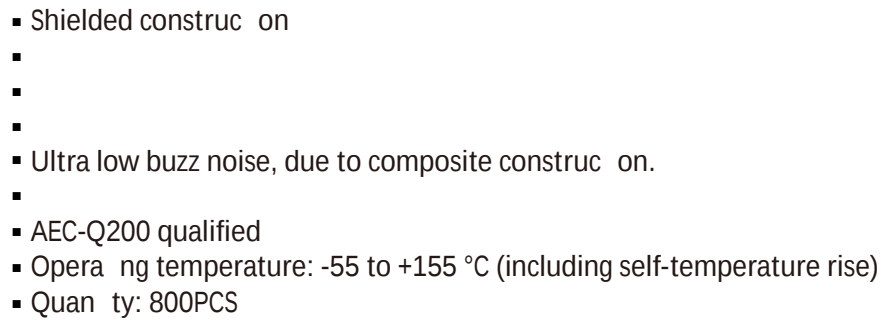


- Dimensions: [mm]


[illegible]




Part No	Inductance @ 100KHz/1V (μH)	Tolerance	Temperature Rise Current Typ. (A)	Satura on Current Typ. (A)	DC Resistance Typ. (mΩ)	DC Resistance Max. (mΩ)

Typical Electrical Characteristics:

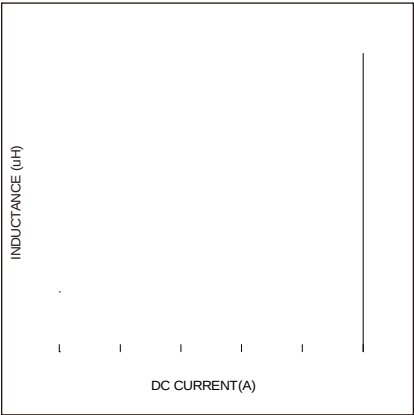

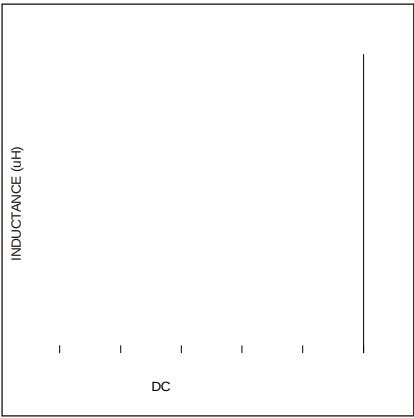

Soldering Reflow:

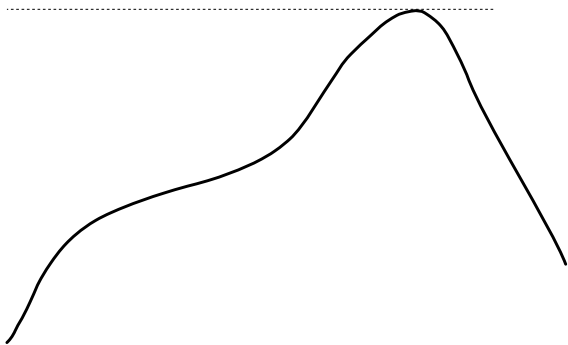


Preheat condition: 150 ~200℃ / 60~120 sec.
Allowed time above 217℃ : 60~90 sec.
Max temperature: 260℃ .

Allowed Reflow time: 2x max.

Packaging Information:

Tape Dimension :

Peel force of top cover tape:

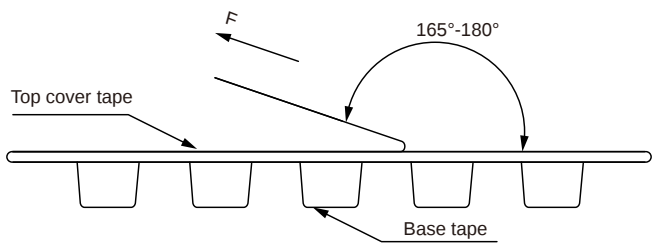


The peel force of top cover tape shall be between 0.1 to 1.3 N

Product Marking:


Marking	K+Printing (Inductance+period)
---------	--------------------------------




Reel Dimension: [mm]

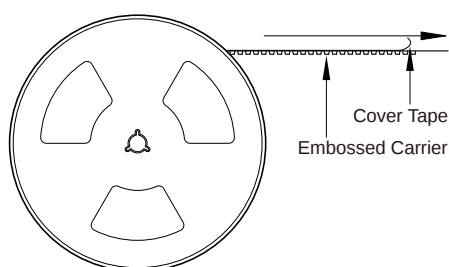

2.2 ± 0.5




Packaging Quantity:



800 Pcs/Reel



2 Reel /Inner box(1600 Pcs)



3 Inner box/Carton box(4.8K Pcs)

Cautions and Warnings:

Storage Conditions:

Operation Instructions: