

MDTA Series

Flat Wire Molded Inductor

Size 6060


FEATURES

- Flat wire coil for low copper losses
- / 0Ψμ0σ00\$ 00o\$ Ψ00\$00P 0PP0Xσ 10° 1 σ00000Γ00 0000\$000
- 3\$00l P0X 0000σΓ0 0000\$ 00\$ 0\$00l P0X P\$000° \$ 000 0000\$
- High current c00000000 00\$ 100\$P\$σ 10° 1 00000000 current spi0es
- AE/ v 00000000
-
-


APPLICATION

-
-

Dimensions: [mm]

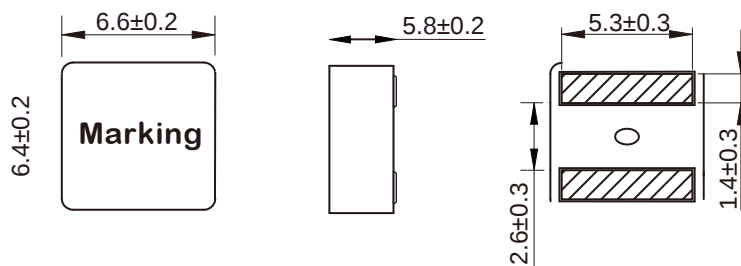


Land Pattern: [mm]



Electrical Properties:



Reel Dimension: [mm]

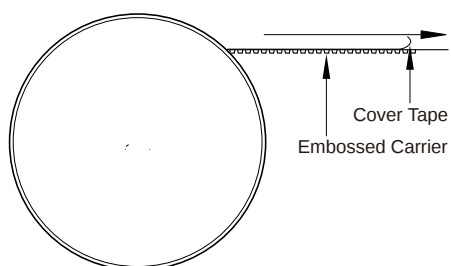

Packaging Quantity: